
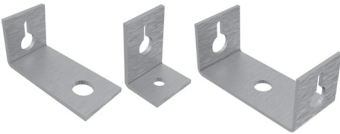
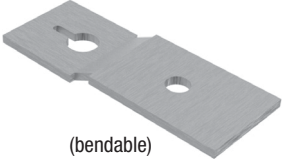
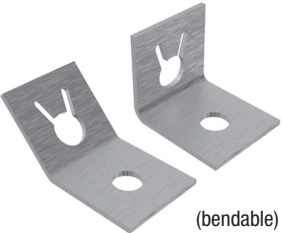
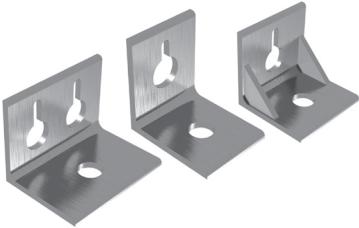
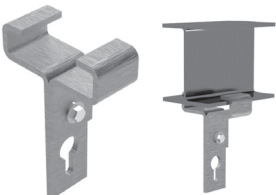


Belt and Utility Hangers



JENNMAR offers a complete line of belt hangers to be used for hanging belt structures within the mine.

The following table shows some typical belt hanger assemblies that are available and used throughout the mining industry. If you require a specific or customized assembly, our experienced team of engineers can design a belt hanger assembly that meets your specific needs.

| Model No./Type | Typical Dimensions, in. (mm) | | | | |
|---|---|------------------------------|------------------|---------------------|---|
| | Material Thickness | Legs | Length | Thru Hole Diameter | Key Hole Size |
| J-16  | 3/16–3/8 (5–10) | 4-1/4 × 4-1/4 (108 × 108) | 4 (102) | 1-1-5/8 (25–41) | Length: 2-1/4 (57) Slot: 3/8 (10) Hole: 1-3/8 (35) |
| Optional J-16 Designs  | | | | | |
| J-9  (bendable) | 1/8 (3) | 4 × 6 (102 × 152) | 4 (102) | 1-1-1/2 (25–38) | Length: 2-3/8 (60) Slot: 3/8 (10) Hole: 1-3/8 (35) |
| Rabbit Ear  (bendable) | 1/4–3/8 (6–10) | 4 × 4 (102 × 102) | 4 (102) | 1-1-9/16 (25–40) | Slot: 3/8–1/2 (10–13) Hole: 1-1/2 (38) |
| Angle  | 3/8–1/2 (10–13) | 5 × 5 (127 × 127) | 4–8 (102–203) | 1-1-5/8 (25–41) | Length: 3 (76) Slot: 9/16 (14) Hole: 1-5/8 (41) |
| Belt Hanger for Steel Sets  | Two-Piece Clamp Style Belt Hanger to Be Used with Steel Sets. Design Can Be Modified to Fit a Variety of Beam Sizes. | | | | |